


**BL-422 STONE ANCHOR**

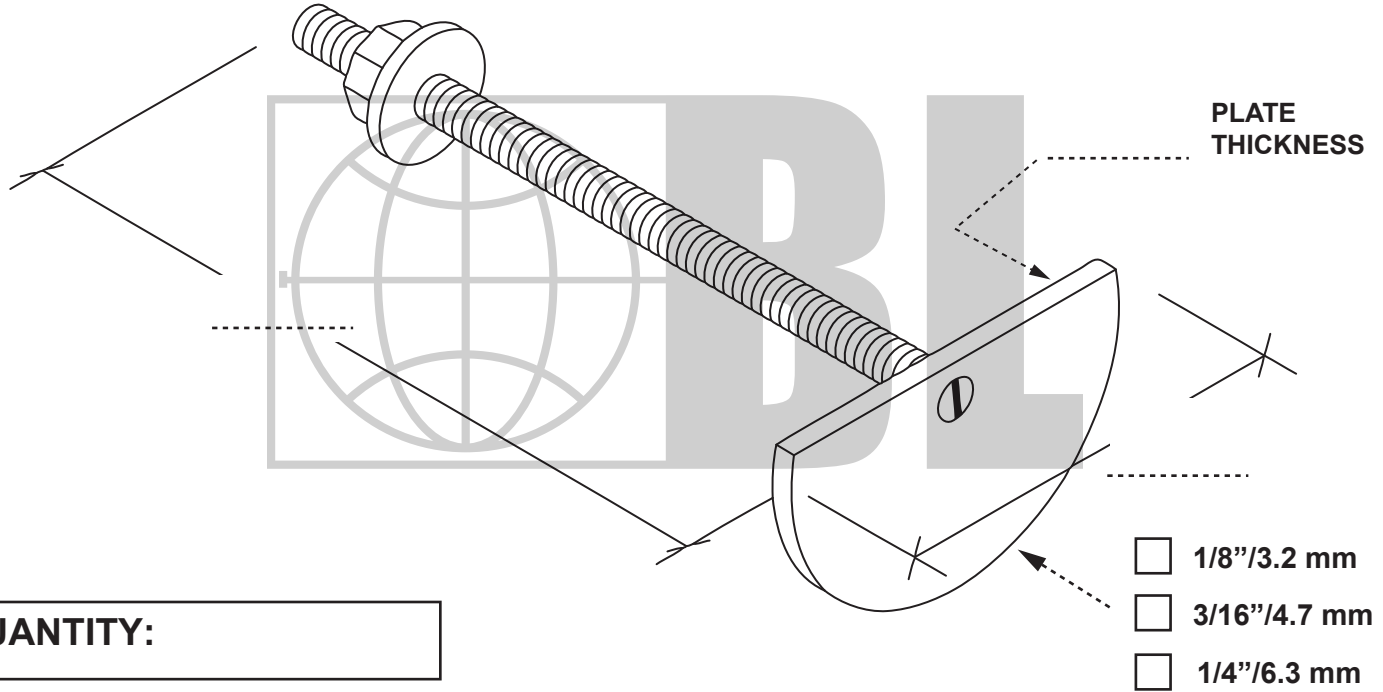

**QUANTITY:**

ST/ST Plate Min. Fy. = 45,000 p.s.i. (ASTM A666)  
ST/ST Rounds Min. Fy. = 75,000 p.s.i. (ASTM A580)

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

<p><b>FINISH:</b></p> <p><input type="checkbox"/> TYPE 304 Stainless Steel</p> <p><input type="checkbox"/> TYPE 316 Stainless Steel</p>	<p><b>ROD DIAMETER:</b></p> <table style="width: 100%;"> <tr> <td><input type="checkbox"/> 1/4" / 6.3 mm</td> <td><input type="checkbox"/> 3/8" / 9.5 mm</td> <td><input type="checkbox"/> 5/8" / 15.8 mm</td> </tr> <tr> <td><input type="checkbox"/> 5/16" / 7.9 mm</td> <td><input type="checkbox"/> 1/2" / 12.7 mm</td> <td><input type="checkbox"/> OTHER _____</td> </tr> </table>	<input type="checkbox"/> 1/4" / 6.3 mm	<input type="checkbox"/> 3/8" / 9.5 mm	<input type="checkbox"/> 5/8" / 15.8 mm	<input type="checkbox"/> 5/16" / 7.9 mm	<input type="checkbox"/> 1/2" / 12.7 mm	<input type="checkbox"/> OTHER _____
<input type="checkbox"/> 1/4" / 6.3 mm	<input type="checkbox"/> 3/8" / 9.5 mm	<input type="checkbox"/> 5/8" / 15.8 mm					
<input type="checkbox"/> 5/16" / 7.9 mm	<input type="checkbox"/> 1/2" / 12.7 mm	<input type="checkbox"/> OTHER _____					

Blok-Lok recommends the exclusive use of 304 or 316 ST/ST for stone anchorage.

<p><b>PROJECT NAME:</b></p> <p><b>LOCATION:</b></p> <p><b>NOTES:</b></p>	<p><b>CONTACT INFO</b></p> <p><b>Name :</b></p> <p><b>Company:</b></p> <p><b>Phone:</b> <span style="float: right;"><b>FAX:</b></span></p> <p><b>Email:</b></p>
--	---

The appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other professionals who are familiar with the specific requirements of the project.