BLOK-LOK
A HOHMANN & BARNARD COMPANY

STAINLESS STEEL STONE ANCHORS

BL-424 STONE ANCHOR

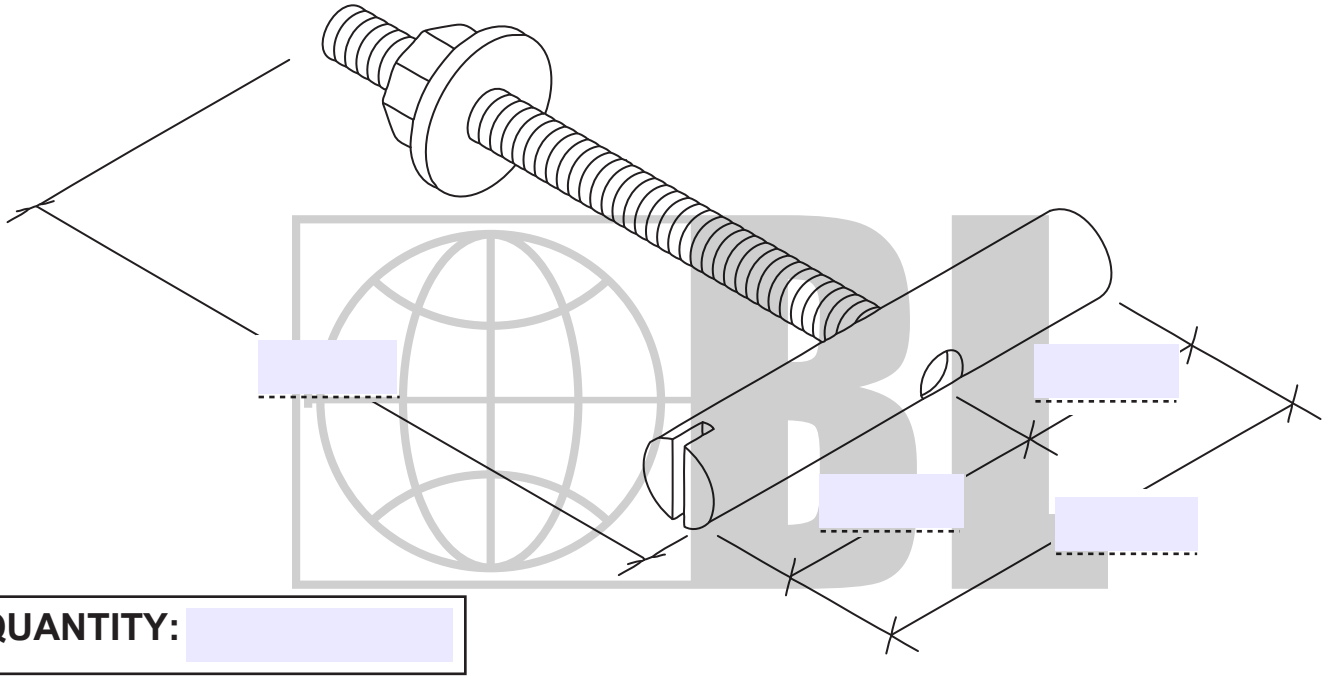

QUANTITY:

ST/ST Rounds Min. Fy. = 75,000 p.s.i. (ASTM A580)

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

FINISH:

- ☐ TYPE 304 Stainless Steel
- ☐ TYPE 316 Stainless Steel

DIAMETER (THREADED ROD):

- ☐ 1/4”/6.3 mm
- ☐ 1/2”/12.7 mm
- ☐ 3/4”/19 mm
- ☐ 3/8”/9.5 mm
- ☐ 5/8”/15.8 mm
- ☐ OTHER _____

DIAMETER (BARREL):

- ☐ 1/4”/6.3 mm
- ☐ 1/2”/12.7 mm
- ☐ 3/4”/19 mm
- ☐ 3/8”/9.5 mm
- ☐ 5/8”/15.8 mm
- ☐ OTHER _____

Blok-Lok recommends the exclusive use of 304 or 316 ST/ST for stone anchorage.

PROJECT NAME:

LOCATION:

NOTES:

CONTACT INFO

Name :

Company:

Phone: **FAX:**

Email:

The appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other professionals who are familiar with the specific requirements of the project.

PRINT FORM | SAVE FORM | RESET FORM

BLOK-LOK
12 Ashbridge Circle | Woodbridge, Ontario L4L 3R5
T: 905.266.2277 | **F:** 905.266.2272 | **USA:** 1.800.561.3026
sales@blok-lok.com | www.blok-lok.com

© BLOK-LOK - 2010