
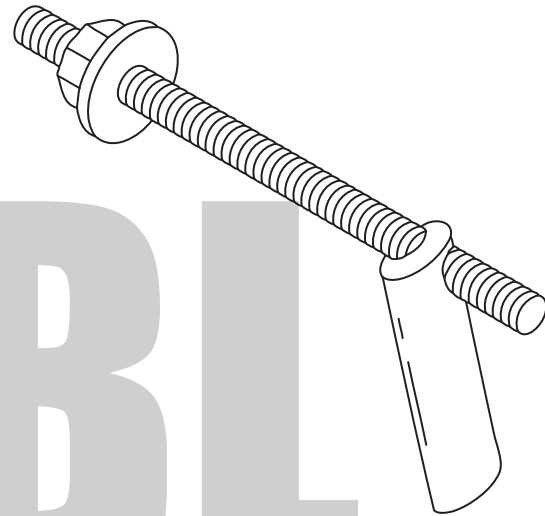


BL-425 STONE ANCHOR

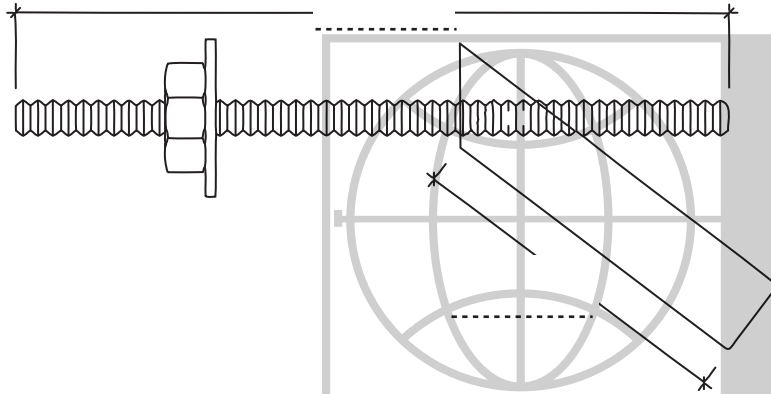

QUANTITY:

ST/ST Rounds Min. Fy. = 75,000 p.s.i. (ASTM A580)

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

| | |
|---|---|
| <p>FINISH:</p> <p><input type="checkbox"/> TYPE 304 Stainless Steel</p> <p><input type="checkbox"/> TYPE 316 Stainless Steel</p> | <p>DIAMETER (THREADED ROD):</p> <p><input type="checkbox"/> 1/4"/6.3 mm <input type="checkbox"/> 1/2"/12.7 mm</p> <p><input type="checkbox"/> 3/8"/9.5 mm <input type="checkbox"/> OTHER _____</p> <p>DIAMETER (BARREL):</p> <p><input type="checkbox"/> 1/4"/6.3 mm <input type="checkbox"/> 1/2"/12.7 mm <input type="checkbox"/> 3/4"/19 mm</p> <p><input type="checkbox"/> 3/8"/9.5 mm <input type="checkbox"/> 5/8"/15.8 mm <input type="checkbox"/> OTHER _____</p> |
|---|---|

Blok-Lok recommends the exclusive use of 304 or 316 ST/ST for stone anchorage.

| | |
|--|---|
| <p>PROJECT NAME:</p> <p>LOCATION:</p> <p>NOTES:</p> | <p>CONTACT INFO</p> <p>Name :</p> <p>Company:</p> <p>Phone: FAX:</p> <p>Email:</p> |
|--|---|

The appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other professionals who are familiar with the specific requirements of the project.