BLOK-LOK
A HOHMANN & BARNARD COMPANY

STAINLESS STEEL STONE ANCHORS

BL-433 STONE ANCHOR

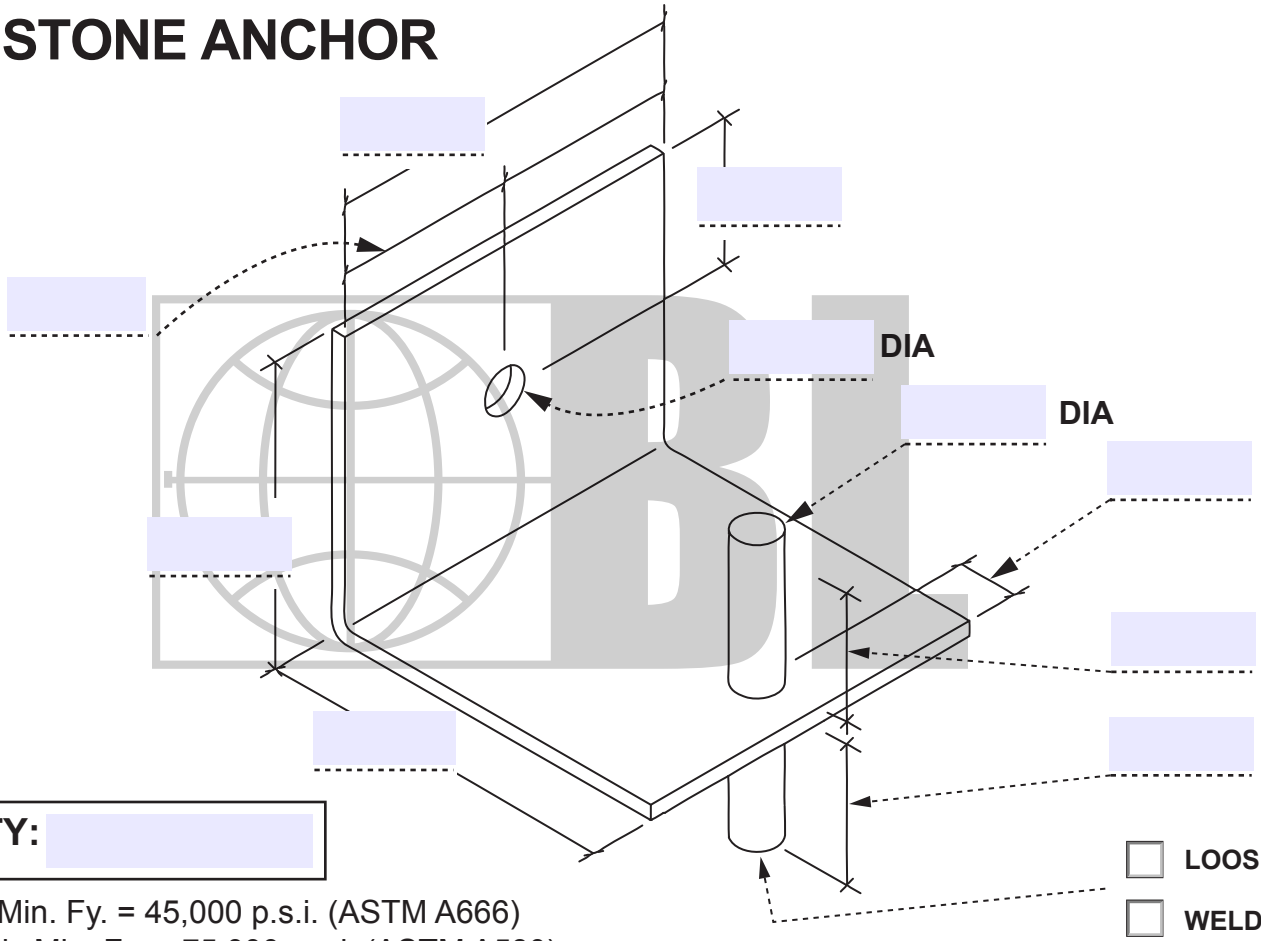

QUANTITY:

ST/ST Plate Min. Fy. = 45,000 p.s.i. (ASTM A666)
ST/ST Rounds Min. Fy. = 75,000 p.s.i. (ASTM A580)

☐ LOOSE
☐ WELDED

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

FINISH:

- ☐ TYPE 304 Stainless Steel
- ☐ TYPE 316 Stainless Steel

THICKNESS:

- ☐ 12 ga./4.8 mm
- ☐ 3/16”/4.7 mm
- ☐ 3/8”/9.5 mm
- ☐ 1/8”/3.2 mm
- ☐ 1/4”/6.3 mm
- ☐ OTHER _____

Blok-Lok recommends the exclusive use of 304 or 316 ST/ST for stone anchorage.

PROJECT NAME:
LOCATION:
NOTES:

CONTACT INFO
Name :
Company:
Phone: **FAX:**
Email:

The appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other professionals who are familiar with the specific requirements of the project.

PRINT FORM | SAVE FORM | RESET FORM

BLOK-LOK
12 Ashbridge Circle | Woodbridge, Ontario L4L 3R5
T: 905.266.2277 | **F:** 905.266.2272 | **USA:** 1.800.561.3026
sales@blok-lok.com | www.blok-lok.com

© BLOK-LOK - 2010