


HOHMANN & BARNARD, INC.
a MiTek company

Veneer Anchors

Thermal 2-Seal™ Tie

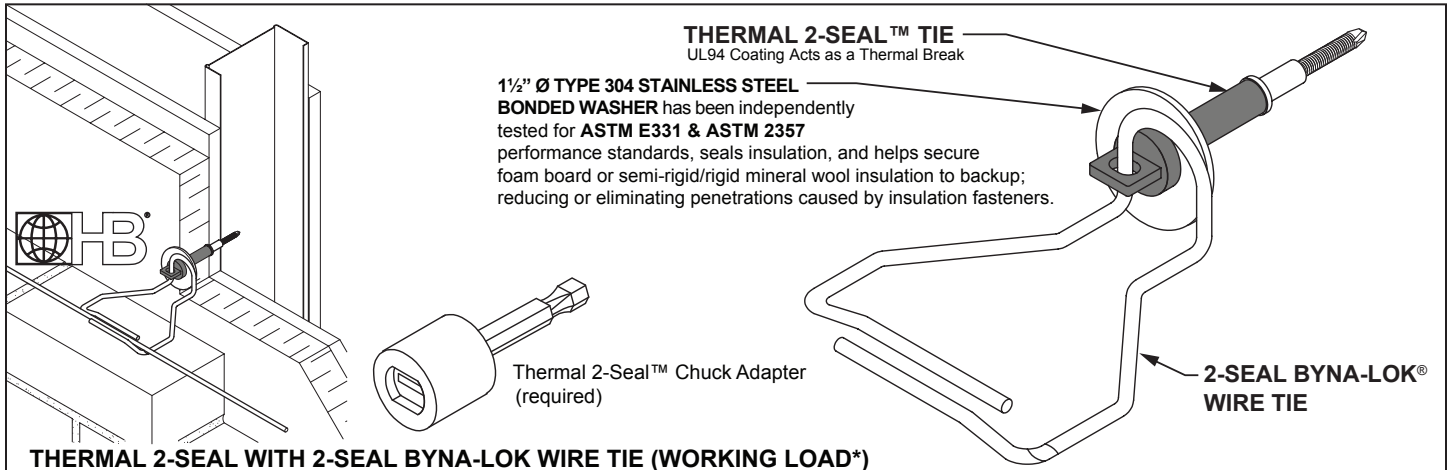

THERMAL 2-SEAL WITH 2-SEAL BYNA-LOK WIRE TIE (WORKING LOAD*)

CAVITY	0" OFFSET	5/8" OFFSET	1 1/4" OFFSET	TEST
6 1/2"	573#	N/A	206#	TENSION
6 1/2"	402#	N/A	166#	COMPRESSION

* WORKING LOAD DETERMINED AT .05" DEFLECTION

Tests were completed for 4 1/2" insulation with 2" air cavity.

Pullout values assume wire 2-Seal Byna-Lok Wire Tie is fully engaged into 2-Seal Tie with "0" eccentricity.

SCREW PULL-OUT (ULTIMATE LOAD)

STUD GA	18 GA	16 GA	14 GA	12 GA
	611#	743#	1096#	1394#

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

H&B RECOMMENDS 16" X 16" SPACING

Thermal 2-Seal™ Tie

An innovative single screw veneer tie for metal stud construction. The 2-Seal™ Tie has a dual-diameter barrel with factory-installed EPDM washers to seal both the face of the insulation and the air/vapor barrier.

- #12 screw integrated into the dual-diameter barrel
- Available for 5/8" - 4 1/2" wallboard (5/8") + insulation combination

The 2-Seal Byna-Lok Wire Tie is adaptable for seismic zones with the simple addition of 9 gauge or 3/16" continuous wire (just drop into the integral track formed by the swaged, overlapping legs of the wire tie.)

The anchor is FULLY COATED, except for the small barrel and screw, with a proprietary material tested in accordance to UL94 (The Standard for Flammability of Plastic Materials). The material reduces thermal transfer through rigid insulation.

Barrel (Stainless Steel): ASTM A580/A580M - AISI Type 304

Screw (Carbon Steel): ASTM A510 (Carbon Steel)

ASTM C954 (1000-hour polymer coating)

Coating: ASTM D792 (density), ASTM D785 (Hardness),

ASTM D955 (Mould Shrinkage), ASTM D638 (Tensile Strength),

ASTM D790 (Flexural Strength), ASTM D256 (Izod Impact

Strength), ASTM D1525 (Softening Temp) ASTM D648 (Heat

Distortion Temp.), UL94 (Flammability)

Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to ASTM A1064/A1064M

Tensile Strength - 80,000 p.s.i. | Yield Point - 70,000 p.s.i. minimum

Zinc Coating:

Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B (1.5 oz/ft²)**

Wire (Stainless Steel): ASTM A580/A580M - AISI Type 304 or Type 316

U.S. Patent No. 8,037,653, 9,140,001 & 9,758,958

Canadian Patent No. 2,690,819

OTHER PATENTS PENDING

2-Seal™ Tie Barrel Finish:

Type 304 Stainless Steel Barrel

Thermal 2-Seal™ Tie Style (Equal to thickness of 5/8" wallboard + insulation):

5/8" 2" 3 1/2" 5" 6 1/2"
 1" 2 1/2" 4" 5 1/2"
 1 1/2" 3" 4 1/2" 6"

2-Seal Byna-Lok™ Wire Tie Finish:

Hot-Dip Galvanized | Stainless Steel Type 304 Type 316

2-Seal Byna-Lok™ Wire Tie Length: (3/16"Ø)

3" 4" 5" Custom _____

Continuous Wire Finish:

Hot-Dip Galvanized | Stainless Steel Type 304 Type 316

Continuous Wire Diameter: 9 gauge 3/16"Ø

Thermal 2-Seal™ Chuck Adapter (required)

Note: Hohmann & Barnard recommends Stainless Steel for maximum protection against corrosion.

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question. This drawing and/or data sheet is the confidential and proprietary information of Hohmann & Barnard, Inc. and is not to be reproduced, copied or disclosed, in whole or in part, without the prior written consent of H&B.

HOHMANN & BARNARD, Inc.
CORPORATE HEADQUARTERS
30 Rasons Court | Hauppauge, NY 11788
T: 800.645.0616 F: 631.234.0683
www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ARIZONA - ILLINOIS
MARYLAND - NEW YORK
PENNSYLVANIA - TEXAS - UTAH
CANADA

© 2013-2018 MiTek®