



Partition Top Anchors PTA-364



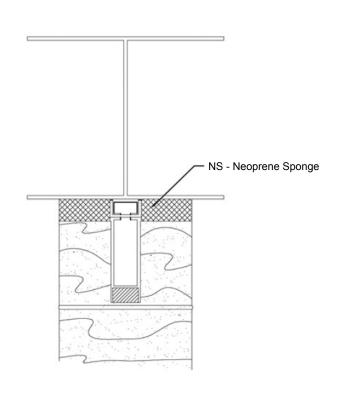

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Sheet Metal (Carbon Steel):
ASTM A 366/A 366M (Cold-rolled)
ASTM A 569 (Hot-rolled, pickled and oiled)

Finishes - Sheet metal (Carbon-Steel):
Mill Galvanized - ASTM A 653 Coating Designation G60
Hot-Dip Galvanized - ASTM A 153 class B (sheet metal ties and anchors hot-dip galvanized after fabrication).
Note: Blok-Lok will certify to a minimum zinc coating of 2.0 oz./ft.²

Sheet Metal (Stainless Steel):
ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors) (Type 316 available on special order)
Note: Blok-Lok recommends Stainless Steel for maximum protection against corrosion.

Manufactured from Clear Butyrate. Tested in conformance with ASTM D 542, D 149,

Finishes:

Mill Galvanized
Hot-Dip galvanized
Stainless Steel

Note: NS-Neoprene Sponge also available.

Thickness (straps):

12 gauge

Other

12 Ashbridge Circle | Woodbridge, Ontario, L4L 3R5, Canada

T: 905.266.2277 | **F**: 905.266.2272 | **USA**: 1.800.561.3026

sales@blok-lok.com | www.blok-lok.com

D 696 and D 257.