


Partition Top Anchors PTA -420

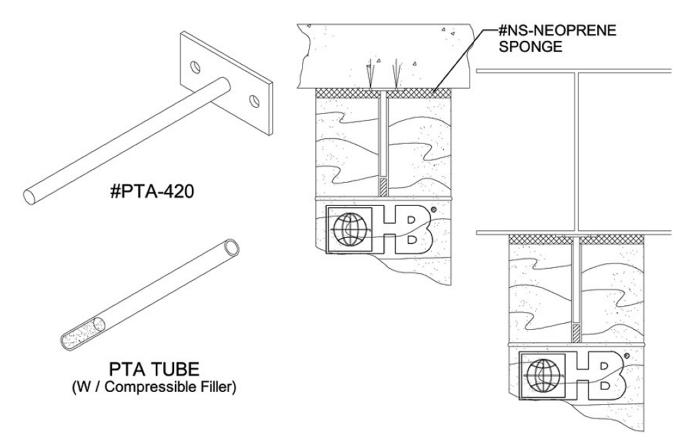

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Sheet Metal (Carbon Steel):

ASTM A 366/A (Cold-rolled)

ASTM A 569 (Hot-rolled, pickled and oiled)

Finishes - Sheet metal (Carbon-Steel):

Mill Galvanized - ASTM A 653 Coating Designation G60

Hot-Dip Galvanized - ASTM A 153 class B (sheet metal ties and anchors hot-dip galvanized after fabrication).

Note: Blok-Lok will certify to a minimum zinc coating of 2.0 oz./ft.2

Sheet Metal (Stainless Steel):

ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors) (Type 316 available on special order)

Note Blok-Lok recommends Stainless Steel for maximum protection against corrosion.

Rod:

Zinc Plated - ASTM A 108, A 36, B 633 Hot-Dip Galvanized - ASTM A 153 Stainless Steel Type 304 - ASTM A 582

PTA Tube

Manufactured from Clear Butyrate. Tested in conformance with ASTM D 542, D 149, D 696 and D 257.

PTA-420	is 12 ga.	thick x 1 ½	∕₂" wide x	3" long (with
5/16"dia.	holes) pla	ate welded	to a 3/8"	dia. x 7"	long rod.

Finishes:

Hot-Dip Galvanized
Stainless Steel

Note: NS-Neoprene Sponge also available.