


#PTA-422

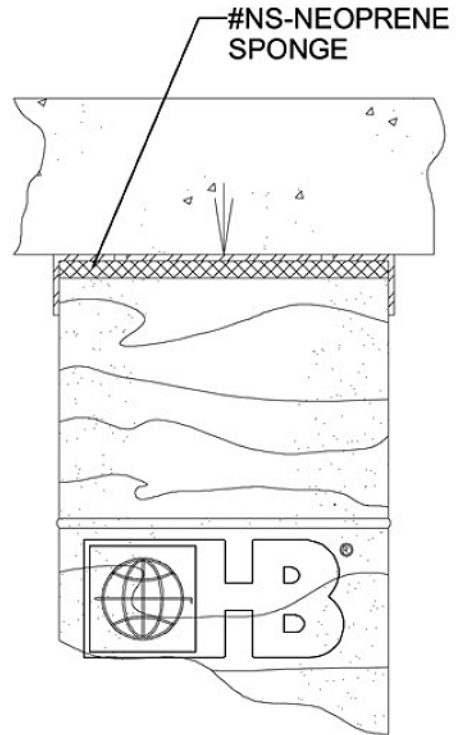

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Sheet Metal (Carbon Steel):
ASTM A 366/A (Cold-rolled)
ASTM A 569 (Hot-rolled, pickled and oiled)

Finishes - Sheet metal (Carbon-Steel):
Mill Galvanized - ASTM A 653 Coating Designation G60
Hot-Dip Galvanized - ASTM A 153 class B (sheet metal ties and anchors hot-dip galvanized after fabrication).

Note: Blok-Lok will certify to a minimum zinc coating of 2.0 oz./ft.²

Sheet Metal (Stainless Steel):
ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors) (Type 316 available on special order)

Note: Blok-Lok recommends Stainless Steel for maximum protection against corrosion.

Finishes:

- Mill Galvanized
- Hot-Dip Galvanized
- Stainless Steel

Size:

12 ga. x block size (select below) with 2 ½" bends

- | | | |
|------------------------------|------------------------------|-----------------------------|
| <input type="checkbox"/> 4" | <input type="checkbox"/> 6" | <input type="checkbox"/> 8" |
| <input type="checkbox"/> 10" | <input type="checkbox"/> 12" | |

Note: NS-Neoprene Sponge also available.