


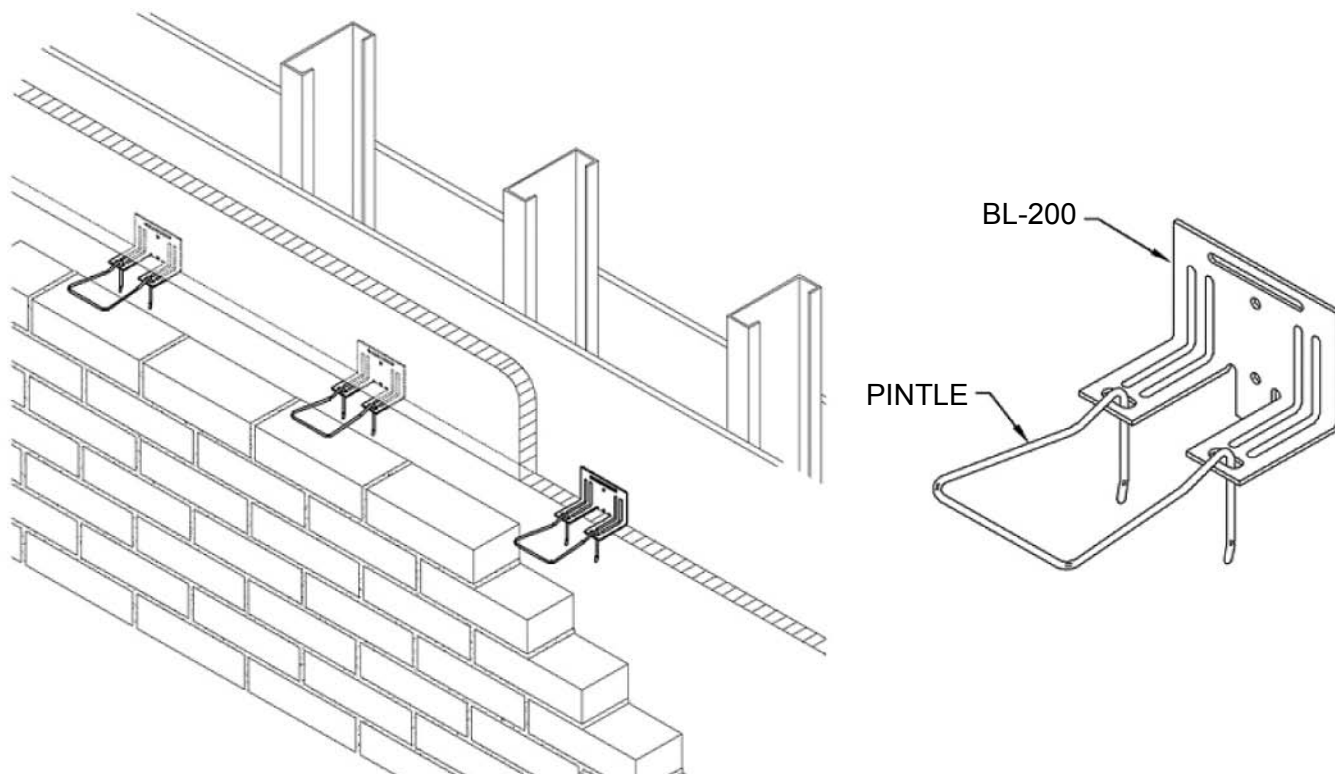

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Wire (Carbon Steel):

Cold-drawn steel wire conforming to ASTM A 82:

Tensile Strength - 80,000 p.s.i.

Yield Point - 70,000 p.s.i. minimum

Zinc Coating:

Hot-dip galvanized after fabrication: ASTM A 153 (1.5 oz/ft²)

NOTE: Blok-Lok will certify to a minimum of 2.0 oz/ft²

Wire (Stainless Steel):

ASTM A 580 - AISI Type 304 (Type 316 available on special order)

Sheet Metal (Carbon Steel):

ASTM A 366

Zinc Coating:

ASTM A 153 Class B (sheet metal ties and anchors hot-dip galvanized after fabrication).

NOTE: Blok-Lok will certify to a minimum of 2.0 oz/ft²

Sheet Metal (Stainless Steel):

ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors)(Type 316 available on special order).

NOTE: Blok-Lok recommends Stainless Steel for maximum protection against corrosion.

BL-200 Backplate

Style **Insulation Thickness**

☐ BL-200 (0")	0"
☐ BL-200 (1")	1"
☐ BL-200 (1 ½")	1 ½"
☐ BL-200 (2")	2"
☐ BL-200 (2 ½")	2 ½"
☐ BL-200 (3")	3"
☐ BL-200 (3 ½")	3 ½"

Thickness:

- ☐ 14 Gauge
☐ 12 Gauge

3/16"Ø Pintle Length:

- ☐ 3"
☐ 4"
☐ 4 ¾"
☐ 5 ¼"
☐ Custom _____

Finish:

- ☐ Hot-Dip Galvanized
☐ Stainless Steel