

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

WIRE (Carbon Steel):

Cold-drawn steel wire conforming to ASTM A 82:
Tensile Strength - 80,000 p.s.i.
Yield Point - 70,000 p.s.i. minimum
Zinc Coating: Hot-dip galvanized after fabrication: ASTM A 153 (1.5 oz/fl)
Note: Blok-Lok will certify to a minimum of 2.0 oz/fl

WIRE (Stainless Steel):

ASTM A 580 - AISI Type 304. (Type 316 available on special order.)

SHEET METAL (Carbon Steel):

ASTM A 366
Zinc Coating: ASTM A 153 Class B (sheet metal ties and anchors hot-dip galvanized after fabrication).
Note: Blok-Lok will certify to a minimum of 2.0 oz/fl

SHEET METAL (Stainless Steel):

ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors) (Type 316 available on special order).
Note: Blok-Lok recommends Stainless Steel for maximum protection against corrosion.

X-SEAL™ TAPE: Polyethylene foam supplied in 3" x 50 ft. rolls conforming to ASTM D 4819, D 3575, D 412

FINISH:

- Hot-Dip Galvanized
 Stainless Steel

LEG DEPTH (Equal to thickness of wallboard/insulation):


- | | |
|--|--|
| <input type="checkbox"/> X-SEAL (5/8") | <input type="checkbox"/> X-SEAL (2-1/2") |
| <input type="checkbox"/> X-SEAL (3/4") | <input type="checkbox"/> X-SEAL (3") |
| <input type="checkbox"/> X-SEAL (1") | <input type="checkbox"/> X-SEAL (3-1/2") |
| <input type="checkbox"/> X-SEAL (1-1/2") | <input type="checkbox"/> X-SEAL (4") |
| <input type="checkbox"/> X-SEAL (2") | <input type="checkbox"/> X-SEAL (5") |

THICKNESS: 14 Gauge

VEE BYNA-TIE®

- Diameter:** 3/16"Ø Standard 1/4"Ø Heavyweight
Length: 3" 3-1/2" 4" 4-1/2" 5"
 OTHER LENGTH _____

X-SEAL® TAPE: Polyethylene foam supplied in 3"x50 ft. rolls conforming to ASTM D 4819, D 3575, D 412

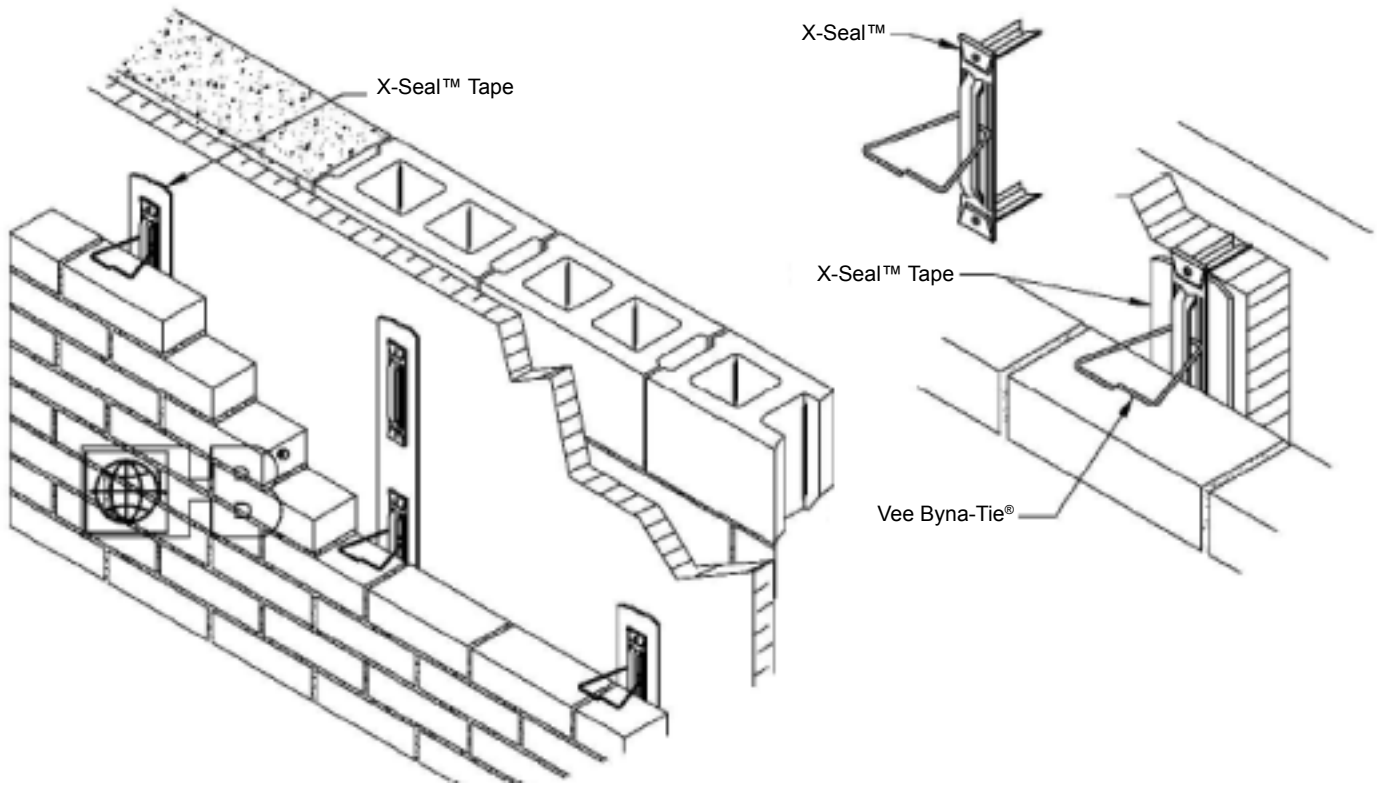

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

WIRE (Carbon Steel):

Cold-drawn steel wire conforming to ASTM A 82:
Tensile Strength - 80,000 p.s.i.
Yield Point - 70,000 p.s.i. minimum
Zinc Coating: Hot-dip galvanized after fabrication: ASTM A 153 (1.5 oz/fl)
Note: Blok-Lok will certify to a minimum of 2.0 oz/fl

WIRE (Stainless Steel):

ASTM A 580 - AISI Type 304. (Type 316 available on special order.)

SHEET METAL (Carbon Steel):

ASTM A 366
Zinc Coating: ASTM A 153 Class B (sheet metal ties and anchors hot-dip galvanized after fabrication).
Note: Blok-Lok will certify to a minimum of 2.0 oz/fl

SHEET METAL (Stainless Steel):

ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors) (Type 316 available on special order).
Note: Blok-Lok recommends Stainless Steel for maximum protection against corrosion.

X-SEAL™ TAPE: Polyethylene foam supplied in 3" x 50 ft. rolls conforming to ASTM D 4819, D 3575, D 412

FINISH:

- Hot-Dip Galvanized
 Stainless Steel

LEG DEPTH (Equal to thickness of wallboard/insulation):

- | | |
|--|--|
| <input type="checkbox"/> X-SEAL (5/8") | <input type="checkbox"/> X-SEAL (2-1/2") |
| <input type="checkbox"/> X-SEAL (3/4") | <input type="checkbox"/> X-SEAL (3") |
| <input type="checkbox"/> X-SEAL (1") | <input type="checkbox"/> X-SEAL (3-1/2") |
| <input type="checkbox"/> X-SEAL (1-1/2") | <input type="checkbox"/> X-SEAL (4") |
| <input type="checkbox"/> X-SEAL (2") | <input type="checkbox"/> X-SEAL (5") |

THICKNESS: 14 Gauge

VEE BYNA-TIE®

- Diameter:** 3/16"Ø Standard 1/4"Ø Heavyweight
Length: 3" 3-1/2" 4" 4-1/2" 5"
 OTHER LENGTH _____

X-SEAL® TAPE: Polyethylene foam supplied in 3"x50 ft. rolls conforming to ASTM D 4819, D 3575, D 412