

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

T1 - Termination Bar

Used at top of flashing to mechanically secure it to the back-up. Compatible with all Blok-Lok Surface-Mount flashings. Available with optional Foam-Tite Seal™ to aid in inhibiting moisture infiltration. A factory-installed foam strip helps seal small voids occurring between the termination bar and any irregular surfaces of the substrate, while offering added protection against water penetration due to deterioration of the sealant.

U.S. Pat. No. 6,945, 000
Other Patents Pending

Blok-Lok sources Stainless Steel from a wide variety of vendors. Per the International Stainless Steel Forum, Stainless Steel objects have an average of 60% recycled content.

Size


1/8" thick x 1" wide x 8' long
with 1/4" diameter holes, spaced 8" O.C.

Finishes

- Stainless Steel (Type 304)
- Aluminum
- Plastic (PVC)

Optional

- FTS (Foam-Tite Seal™)

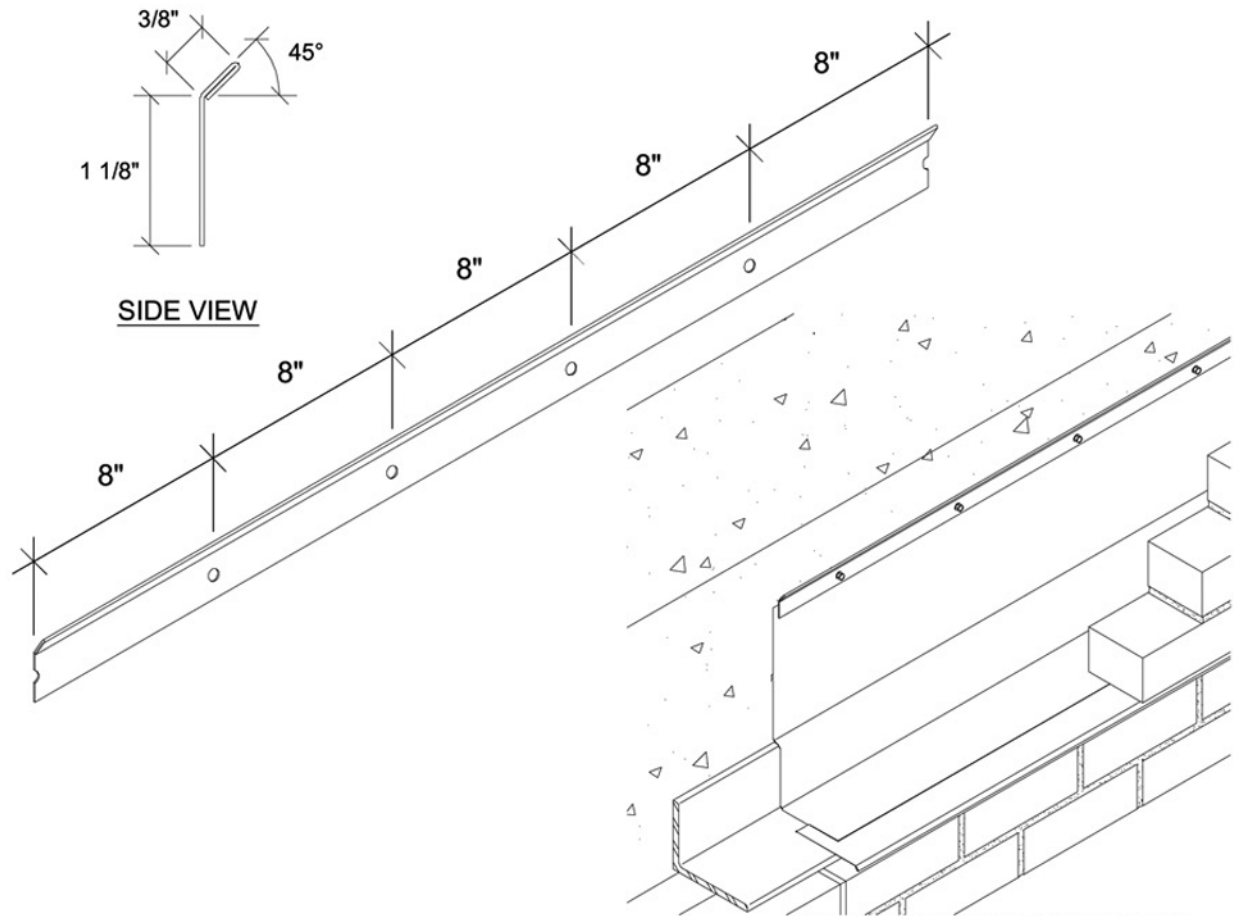

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

T2 - Termination Bar

Used at top of flashing to mechanically secure it to back-up.

- Type 304 stainless steel 26 gauge
- 1/4" holes spaced 8" O.C.
- T2 is single-winged style, to accept bead of caulking

U.S. Pats No. 6,945,000 Other Patents Pending

Blok-Lok sources Stainless Steel from a wide variety of vendors. Per the International Stainless Steel Forum, Stainless Steel objects have an average of 60% recycled content.