


# Anchors & Ties: Masonry to Steel Adjustable Flex-O-Lok® Anchor - Type C

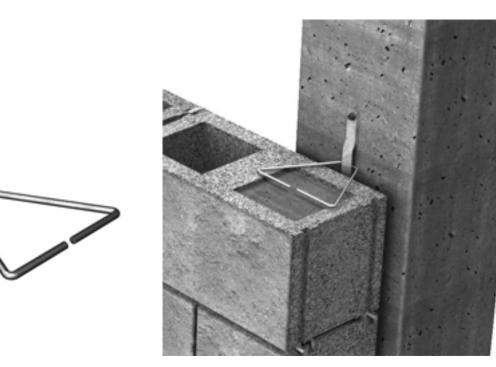

## DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

### Adjustable Flex-O-Lok - Type C

Flex-O-Lok® Type C is a flat bar screw-on anchor for adjustable ties to connect to structural steel.

Dimensions:

10 gauge thick x 3/4" wide x 7" long

### Wire:

1/4" Diameter Wire Carbon Steel per ASTM A 82, Hot-Dip Galvanized per ASTM A153, C1 B2

### Sheet Metal:

Carbon Steel: ASTM A 153 Class B (sheet metal ties and anchors Hot-Dip Galvanized after fabrication). Block-Lok will certify to a minimum of 2.0 oz/ft<sup>2</sup>.

Packaging: 100 pieces per box

Blok-Lok manufactures steel wire products from a minimum of 95% post-consumer recycled material.

12 Ashbridge Circle | Woodbridge, Ontario, L4L 3R5, Canada T: 905.266.2277 | F: 905.266.2272 | USA: 1.800.561.3026 sales@blok-lok.com | www.blok-lok.com

Finish: Hot-Dip Galvanized per ASTM A153, C1 B2

Note: Adjustable ties are recommended as a veneer or cavity wall tie to connect to structural steel, concrete, or CMU.